




ADAPTER KIT TO POWER TAKE OFFS ZF

16-K-130 ; 16-S-112 ; 16-S-150

Ref. VK4005S
VK4005AM

Main Dimensions

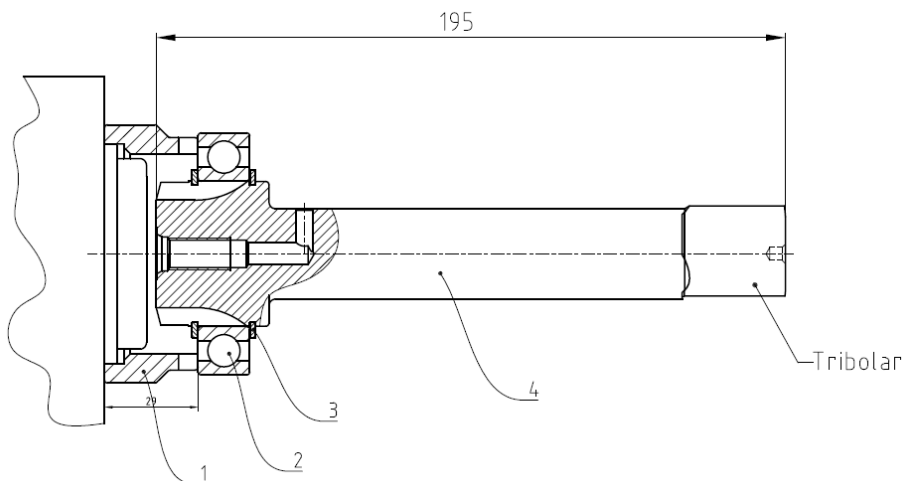

- 1 – Spacer
- 2 – Bearing
- 3 – Circlip
- 4 – Adapter shaft VK4005

(Dimensions in mm)

Main Data

Continuous Torque (Nm)	300
Intermittent Torque (Nm)	420
Power (at 1000 r.p.m)	42 H.P. / 32 Kw
Weight (Kg)	1.7
Engine-Kit adapter ratio	
16-S-112/11.46 High: .- 1 : 0.963 Normal: .- 1 : 0.820 / 13.68 High: .- 1 : 0.963 Normal: .- 1 : 0.820	

Note 1:

For getting the correct ratio is necessary to multiply the above mentioned ratio by the internal ratio in all S6-90 releases.

Example:

Gearbox 16-S-112 / 11.46 Adapter Kit + ZF S6-90 (Ref. TF4002AMP) Internal Ratio 1:1.32

Final ratio: High .- 1 : 1.27116 (0.963 x 1.32 = 1.27116)

Normal .- 1 : 1.0824 (0.82 x 1.32 = 1.0824)

Note 2:

Adapter Kit is supplied without studs. Please use those that are provided with the PTO.

CTI VK4005S / VK4005AM 0811-1

ABER is constantly engaged in improving its products and, therefore, reserves itself the right to modify without any further notice the characteristics shown. The gear boxes are in constant change; therefore, ABER is not to be held responsible for any damage resulting from wrong application or application of outdated material.



ABER - Embraiaçes e Comandos Hidráulicos - A. B. LDA

Rua Francisco de Almeida, Nº 30 – Vila Nova da Telha – 4470 MAIA - Portugal

Telephone: +351.22.9438070 Fax: +351.22.9420823 e-mail: aber@aber.pt <http://www.aber.pt>

1/1